



# Solder Paste

## DP 5505

INTERFLUX®  
ELECTRONICS N.V.



Technical data DP 5505

Ver: 2.1 07-03-13

latest version on [www.interflux.com](http://www.interflux.com)

Page 1

## No-clean, halide free, lead-free solder paste

### Description

**DP 5505** is a no-clean, halide free and lead-free solder paste that has been designed to minimize the 'hidden pillow' defect on bga's.

It has high resistance against moisture and elevated temperatures.


The rheology of **DP 5505** allows for very fast printing speeds, even on small apertures and is excellent for Pin in Paste applications.

Furthermore, the chemistry of **DP 5505** has been designed to minimize void formation. It meets IPC 7095 voiding performance class 3.

**DP 5505** is halide free providing optimal reliability after soldering.

The residues after reflow are minimal and clear, they are easy to be penetrated by flying probe- and ICT-test pins.

**DP 5505** is classified as **RO L0** according IPC and EN standards.

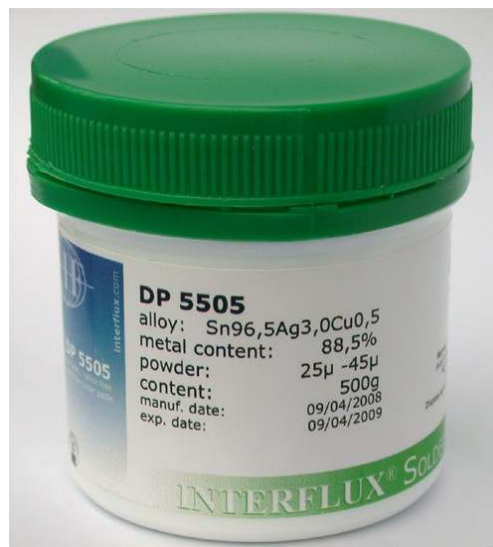

### More information:

<i>Reflow profile</i>	<i>P. 2</i>
<i>Profile recommendations</i>	<i>P. 2</i>
<i>Product handling</i>	<i>P. 3</i>
<i>Test results</i>	<i>P. 3</i>
<i>Operating parameter recommendations</i>	<i>P. 4</i>

### Key advantages:

- High stability / High abandon time
- Optimised formula to prevent the 'hidden pillow' defect on bga's
- Wide process window
- Low voiding
- Low residue after reflow
- Absolutely halogen free

### Availability

alloy	metal content	powder size	packaging
Sn96,5Ag3Cu0,5	printing: 88-89%	Standard type 3 (25— 45µ)	500g jar
Sn95,5Ag3,8Cu0,7			1kg—1,2kg—1,3kg in 12 Oz. cartridge
Sn95,5Ag4Cu0,5	dispensing: 85%	Type 4 and type 5 available for certain alloys	5cc— 10cc— 30cc syringe
Sn99Ag0,3Cu0,7			Other packaging upon request
Sn98,5Ag0,8Cu0,7			
Sn96,5Ag3,5			
Sn95,8Ag4,2			
Sn99,3Cu0,7			



## Reflow profile for SAC, SnCu and SnAg alloys

### General

In general a profile with limited soak is advised. Also ramp profiles and soak profiles are possible. Soak profiles may be used when temperature differences across a board, due to a high mix of components or large board sizes, need to be levelled

out or when voids, if present, need to be decreased.

When soldering an assembly in a lead free solder process, care must be taken not to overheat components especially when using air convection or IR ovens. It is very important to know the temperature

limitations of the components used on the board. To get a good thermal mapping of the board it is advised to use thermocouples and a thermal measuring tool. Measure on small outline, big outline and temperature sensitive components. Measure on the board side near the conveyor chain, in the

middle of the board and close to, or on heat sinks.

## Profile recommendations (SnAgCu, SnCu and SnAg type alloys)

### Preheat

From room temperature until about 200°C at a rate of 1-3°C/seconds. Higher heating rates could result in component cracking due to absorbed moisture.

### Soak

From 180°C to about 200°C at a rate of 0-1°C/seconds.

In some cases a temperature holding soak zone is used to level out differences on a board. It is often used on high mix boards or to reduce voids in certain lead free proc-

esses. A 30-90 sec soak between 180°C and 200°C is often used for this purpose.


### Reflow

Peak temperature used is related to component specifications. In general between 235°C and 250°C. The time in liquidus (over melting

point of the alloy used) could be between 45 seconds and 90 seconds.

### Cooling

Cooling rate around -4°C/second because of differences in thermal expansion of different materials

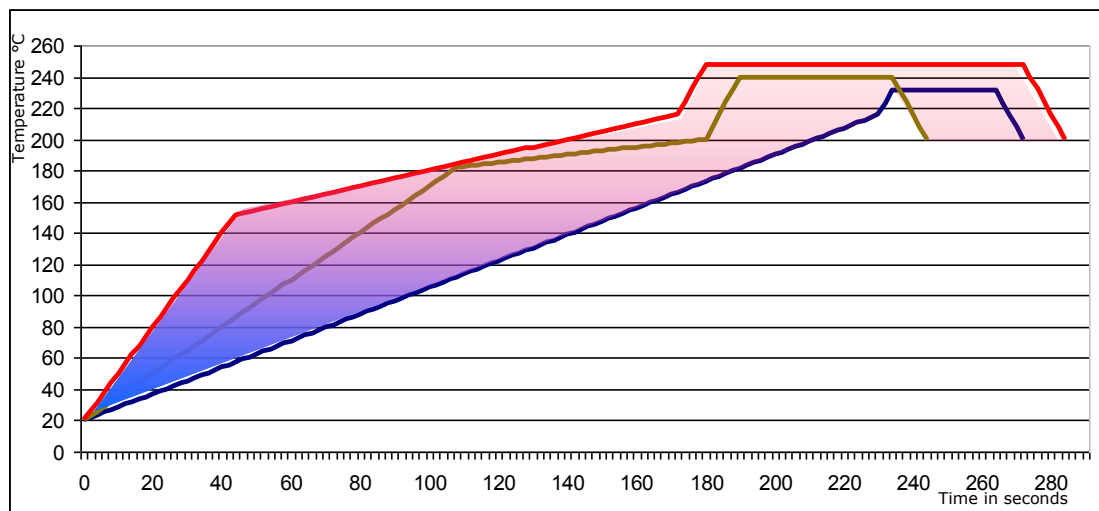



## Handling

### Storage

Store the solder paste in the original packaging, tightly sealed at a preferred temperature of 3° to 7°C

### Handling

Let the solder paste reach room temperature prior to opening the packaging. Stir well before use.

### Printing

Assure good sealing between PCB and stencil. Apply no more than enough squeegee pressure to get a clean stencil. Apply enough solder paste to the stencil to allow smooth rolling during printing. Regular replenish fresh solder paste.

### Maintenance

Set an under stencil clean interval which provides continuous printing quality. **ISC8020** is recommended as cleaning agent in pre saturated wipes and USC liquid.

### Reuse

Do not mix used and fresh paste. Do not put packages back

into refrigeration when already opened. Store used paste in a separate jar at room temperature.

## Test results

conform IPC J-STD-004A/J-STD-005

Property	Result	Method
<b>Chemical</b>		
qualitative copper mirror	<b>pass</b>	J-STD-004A IPC-TM-650 2.3.32
halide content	<b>0,0%</b>	J-STD-004A IPC-TM-650 2.3.28.1
silver chromate (Cl, Br)	<b>pass</b>	J-STD-004A IPC-TM-650 2.3.33
flux classification	<b>RO L0</b>	J-STD-004A
<b>Environmental</b>		
SIR test	<b>pass</b>	J-STD-004A IPC-TM-650 2.6.3.3

Property	Result	Method
<b>Mechanical</b>		
solder ball test after 15min	<b>pass</b>	J-STD-005 IPC-TM-650 2.4.43
after 4h	<b>pass</b>	J-STD-005 IPC-TM-650 2.4.43
wetting test	<b>pass</b>	J-STD-005 IPC-TM-650 2.4.45
slump test after 15min at 25°C	<b>pass</b>	J-STD-005 IPC-TM-650 2.4.35
after 10min at 150°C	<b>pass</b>	J-STD-005 IPC-TM-650 2.4.35



## Operating parameter recommendations

### Printing

speed: 20—150 mm/sec  
squeegee pressure: 250g—350g/cm length  
U.S.C. interval: every 10 boards  
temperature range: 15 to 25°C  
humidity range: 40% to 75% r.H.

### Mounting

tack time: >8 hours

### Reflow

reflow profile: linear and soak  
heating type: convection, ...

### I.C.T

flying probe testable  
pin-bed testable

### Viscosity

- Brookfield (T-spindle 5 rpm@20°C): 700 000 - 1 000 000 cPs  
(88,5% metal content)

### Cleaning

Cleaning of the paste from stencils and tools is recommended with Interflux® **ISC 8020**.

The residues after reflow of DP 5505 are very reliable and don't need to be cleaned, however they can be cleaned if desired.

A compatibility list between Interflux® products and Zestron® cleaning products is available at Interflux.

Trade name : Interflux® DP 5505 No-Clean, Halide Free, Lead Free Solder Paste

D i s c i m i n a t o r

Interflux® Electronics N.V. cannot anticipate or control the many different conditions under which this information and our products may be used, Interflux® Electronics N.V. does not guarantee the applicability or the accuracy of this information or the suitability of our products in any given situation. Users of these products should make their own tests to determine the suitability of each such product for their particular purposes. The products discussed are sold without such warranty, either expressed or implied. Interflux® Electronics N.V. accepts no responsibility for personal injury, property damage, or other type of loss due to negligence or otherwise resulting from the use or handling of this material. Manufacturer's liability is limited to the net purchase price of this product or, at manufacturer's discretion, to the replacement of the product upon its return.

Product information in other European languages can be obtained at Interflux® Electronics NV, 9042 Gent.

Copyright:

**INTERFLUX®** ELECTRONICS

For the latest version of this document please consult:

[www.interflux.com](http://www.interflux.com)